Scheda tecnica



GF Malleable Fittings 374 - dado di raccordo, zincato 2

1154609

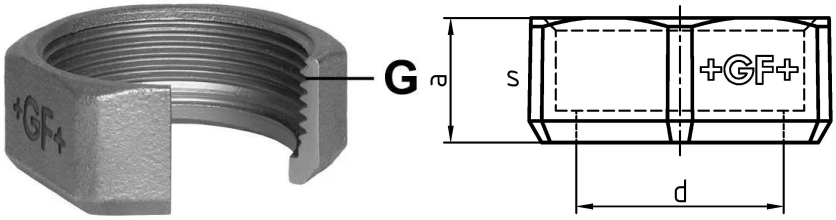

Informazioni GF Malleable Fittings 374 - dado di raccordo, zincato

Specifiche

- With their extensive history and tradition, malleable cast iron fittings are the most common pipe fittings. Because of their durability and mechanical strength, these fittings are very popular. The material is able to endure high mechanical stress and when combined with the standardized jointing method can be used in a wide range of applications.

Application

- Sanitary, heating and gas installation, mechanical engineering (oil, cool pipework), construction of petrol stations (gas lines), sprinkler

GF Malleable Fittings 374 - dado di raccordo, zincato 2

1154609

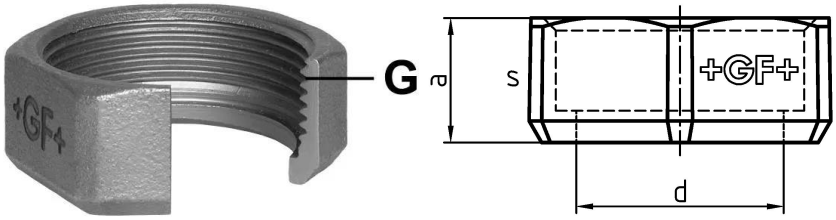

Product code

Item no EAN	7611205444976
Item no GF	770374209
Item no GTIN	07611205444976
Item no NOBB	60639272
Item no NRF	1367004
Item no RSK	1261068
Item no VVS	004374412

Dimensioni

Altezza unità articolo	90
Lunghezza unità articolo	99
Peso unitario dell'articolo	0,387
Larghezza unità articolo	27
Item_UOM	St.

Packaging

GTIN imballaggio PL1	07611205244972
GTIN imballaggio PL4	06414900239943
Altezza imballo PL1	200
Altezza imballo PL4	729
Lunghezza imballo PL1	385
Lunghezza imballo PL4	1200
Quantità imballo PL1	50
Quantità imballo PL4	1350
Tipo di imballaggio PL1	Base_Box
Tipo di imballaggio PL4	Pallet
Volume di imballaggio PL1	0,019635

Volume di imballaggio PL4	0,69984
Peso imballo PL1	19,92
Peso imballo PL4	542,45
Larghezza imballo PL1	255
Larghezza imballo PL4	800

Measurements

Z Measurement a	27
Misura Z d	2
MISURA Z S	90

Documenti tecnici

Download documenti

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Georg Fischer Rohrleitungssysteme (Schweiz) AG

Amsler-Laffon-Strasse 9
8200, Schaffhausen
Schweiz

T +41 52 631 30 26
E ch.ps@georgfischer.com

+GF+